

PLUG-IN → ISLANDS

# Imja WNIJ-14 CSP



## STANDARD FEATURES

- working temperature: from -25°C to -21°C
- refrigerant: R290
- hot gas defrosting
- automatic evaporation of condensate
- electronic controller with temperature indicator
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- thermopane glass
- color of the base black (RAL 9005)
- flat front bumper; in module TG flat front and side bumper
- in module TG sidewalls integrated


## OPTIONS

- sidewalls
- LEDit lighting



Imja WNIJ-14 2500 CSP

CSP — cover | single, straight | sliding (slide-up/push)

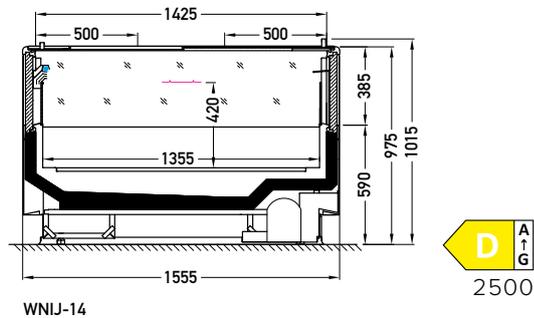

## AVAILABLE MODULES

1875 2500  
1450G

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.